

THE BEAMING POWER **VELVET 2x2 POWER**

**VELVET Power** ADVANTAGES

**VELVET Power**  
THE BEAMING POWER LED PANELS



**POWERFUL**  
UP TO 12000 LUX AT 3 METERS

ROBUST 100% Aluminum body & SILENT Fan free operation

MADE TO LAST  
**VELVET**

**VELVET POWER 2x2** is the most robust and powerful 2x2 LED panel producing long throw directional light without noisy fans




**POWERFUL WORKHORSE**

VELVET Power 2x2 is an incredibly powerful LED directional light from a broad source of 2x2 feet (60x60 cm) running AC/DC with 340W power draw. Is so powerful to be the workhorse lifesaver on any location or studio as:

- ▶ Key directional light replacing a 2,5Kw HMI or 5Kw tungsten
- ▶ Super soft source through the dedicated Snapbag softbox
- ▶ Spacelight for studios up to 10 meter high replacing 6Kw tungsten

**READY TO RIG**

With a wide range of mounting options: Yoke with ergonomic just-one-hand tilt lock, ball head mount (not available for VELVET 2x2), 1/4-20" sliding threads for rigging are located on top and bottom of every VELVET panel.

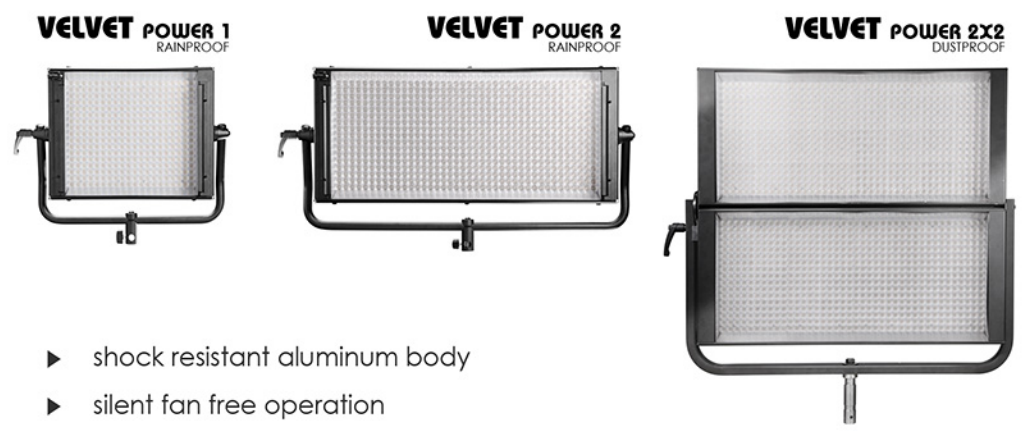

- ▶ shock resistant aluminum body
- ▶ silent fan free operation
- ▶ 2x times more light output
- ▶ more than bi-colour 2700 to 6500 K
- ▶ long throw directional light beam
- ▶ quick setup and adjustment
- ▶ worldwide AC/DC powered
- ▶ bi-directional DMX RDM dual XLR-5 connectors (Studio version)
- ▶ affordable European quality with 2 years warranty
- ▶ 100% made & designed in Barcelona (Spain)

**VELVET Power 1&2 exclusive BENEFITS**

- ▶ rainproof IP54
- ▶ Vlock or Gold battery mount



THE 15° POWER **SPOT Versions**



**LONG THROW BEAM**

VELVET SPOT 15° produce longer throw and 2,5 times more output than the standard VELVET Power 30° version and can be used up to 15 meters (50 feet distance).

Its light can be bounced or easily shaped and softened with the choice of optic diffusers, Snapbag softbox and Snapgrids.



**THELIGHT**  
info@thelight.com.es



Intellectual Property  
THELIGHT VELVET Light technology is protected under Spanish patents and international patents pending  
2016 © Copyright THELIGHT. All rights reserved.

# THE BEAMING RAINPROOF LED PANELS **VELVET 1** POWER

Rainproof **VELVET POWER 1 & 2** produce directional light without noisy fans and are designed to instantly setup & adjust

## DIRECTIONAL LIGHT BEAM

The directional beam is so powerful to be bounced, shaped or softened with the choice of optic diffusers, foldable Snapbags diffusers and Snapgrids


## BEYOND BI-COLOR

Go further than tungsten & daylight in the same unit: Dedicated 3200K/5600K quick-access button. You can precisely adjust color temperature from 2700K to 6500K.

## USEFUL EFFICIENCY

THELIGHT state of the art high efficiency LED technology produce real effects:

- ▶ 2x times brighter than any competitor panel
- ▶ 100% silent fan free operation
- ▶ half power consumption
- ▶ longer running time from batteries

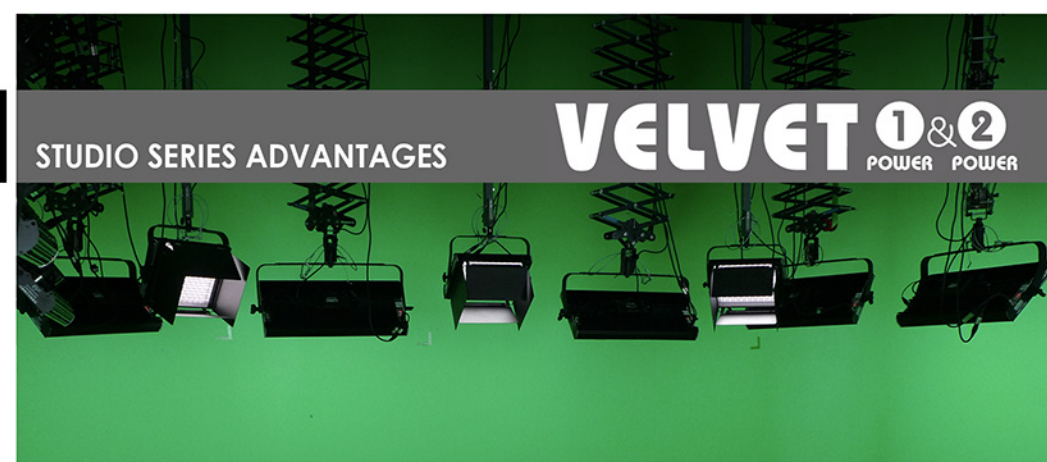

## ADVANCED DMX MASTER/SLAVE

DMX remote control even without a controller! With the Master-Slave function you can link several units and operate without a console. The Master will be the controller for the other units.

## BI-DIRECTIONAL DMX RDM

The perfect solution on Studio simplifying the assignment and channel addressing of every fixture.



## THE VELVET TOUCH

VELVET Light is the all-rounder for every shooting on location or studio. Strong, thin and versatile. VELVET can be powered with any battery or AC worldwide. VELVET panels are designed to be easily rigged and instantly adjusted to match any ambient light and to produce a natural light effect.



# THE RUGGED & QUICK PANELS **VELVET 2** POWER

## QUALITY WHITE LIGHT

Professional and consistent color rendition: With a CRI & TLCI over 90 to get perfect skin tones and real colors. Absolutely consistent lamp to lamp to mix as many VELVET units as you wish to get exactly the same light quality and color reproduction.

## MADE TO LAST

Robust 100% aluminum body, made to endure the toughest working conditions on any situation.

## SILENT FAN FREE OPERATION

THELIGHT exclusive electronics and custom designed aluminum heatsink keep the LED in the optimum temperature to last 50.000 hours using no fans to be serviced

# VELVET Power SERIES TECHNICAL SPECIFICATIONS

| VELVET Power 1   | VELVET Power 1 STUDIO                                  | VELVET Power 2   | VELVET Power 2 STUDIO                                  | VELVET Power 2x2                                       |
|--|--|--|--|--|
| 30° BEAM ANGLE   | 30° BEAM ANGLE   | 30° BEAM ANGLE   | 30° BEAM ANGLE   | 30° BEAM ANGLE   |
| RAINPROOF IP54   | DUSTPROOF  | RAINPROOF IP54   | DUSTPROOF  | DUSTPROOF  |
| DIMENSIONS 380 x 308 x 68mm<br>WEIGHT 3,9 Kg           | DIMENSIONS 380 x 308 x 68mm<br>WEIGHT 3,9 Kg           | DIMENSIONS 690 x 308 x 68mm<br>WEIGHT 7 Kg             | DIMENSIONS 690 x 308 x 68mm<br>WEIGHT 7 Kg             | DIMENSIONS 690 x 620 x 68mm<br>WEIGHT 14 Kg            |
| POWER DRAW 100W<br>0,90 Ah at 110 VAC                  | POWER DRAW 100W<br>0,90 Ah at 110 VAC                  | POWER DRAW 190W<br>1,7 Ah at 110 VAC                   | POWER DRAW 190W<br>1,7 Ah at 110 VAC                   | POWER DRAW 340W<br>3,10 Ah at 110 VAC                  |
| XLR-3 POWER SUPPLY<br>12-35 V DC<br>90-264V AC 50/60Hz | XLR-3 POWER SUPPLY<br>12-35 V DC<br>90-264V AC 50/60Hz | XLR-3 POWER SUPPLY<br>24-35 V DC<br>90-264V AC 50/60Hz | XLR-3 POWER SUPPLY<br>24-35 V DC<br>90-264V AC 50/60Hz | XLR-3 POWER SUPPLY<br>26-28 V DC<br>90-264V AC 50/60Hz |
| XLR-5 x 1<br>IN / OUT DMX-RDM                          | XLR-5 x 2<br>IN / OUT DMX-RDM                          | XLR-5 x 1<br>IN / OUT DMX-RDM                          | XLR-5 x 2<br>IN / OUT DMX-RDM                          | XLR-5 x 2<br>IN / OUT DMX-RDM                          |
| BATTERY OPERATED<br>V-LOCK / GOLD                      | BATTERY OPERATED<br>V-LOCK / GOLD                      | BATTERY OPERATED<br>V-LOCK / GOLD                      | BATTERY OPERATED<br>V-LOCK / GOLD                      | BATTERY OPERATED<br>POWER STATION XLR3                 |
| SPOT VERSION<br>15° BEAM ANGLE                         | SPOT VERSION<br>15° BEAM ANGLE                         | SPOT VERSION<br>15° BEAM ANGLE                         | SPOT VERSION<br>15° BEAM ANGLE                         | SPOT VERSION<br>15° BEAM ANGLE                         |

COLOUR TEMPERATURE Adjustable from 2700 K to 6500 K in 100 K increments

LIGHT INTENSITY Dimmable 0 to 100%

CRI & TLCI 95

BEAM ANGLE VELVET POWER SERIES 30° / VELVET POWER SPOT SERIES 15°

THELIGHT LED Rated life More than 50.000 hours

THELIGHT LED Technology Selected BIN High Power LED + THELIGHT custom optics + CPU software control.

## ACCESORIES

1/4, 1/2 & Full diffusers, foldable Snapbag diffuser, foldable Snapgrid, removable barndoors, center ball mount, yoke mount, PO yokes, AC power adapter, Vlock or Gold battery mounts, Spacelight cylinder, cordura carrying bag, hard case.

## PHOTOMETRICS

| VELVET Power 1                          | VELVET Power 1 STUDIO                   | VELVET Power 2                          | VELVET Power 2 STUDIO                   | VELVET Power 2x2                        |
|---|---|---|---|---|
| 1 meter / 3 feet<br>13000 Lux / 1296 fc | 1 meter / 3 feet<br>13000 Lux / 1296 fc | 1 meter / 3 feet<br>25000 Lux / 2315 fc | 1 meter / 3 feet<br>25000 Lux / 2315 fc | 1 meter / 3 feet<br>40000 Lux / 3700 fc |
| 3 meters / 10 feet<br>2000 Lux / 185 fc | 3 meters / 10 feet<br>2000 Lux / 185 fc | 3 meters / 10 feet<br>4000 Lux / 370 fc | 3 meters / 10 feet<br>4000 Lux / 370 fc | 3 meters / 10 feet<br>8000 Lux / 740 fc |
| 6 meters / 20 feet<br>550 Lux / 51 fc   | 6 meters / 20 feet<br>550 Lux / 51 fc   | 6 meters / 20 feet<br>1000 Lux / 93 fc  | 6 meters / 20 feet<br>1000 Lux / 93 fc  | 6 meters / 20 feet<br>2000 Lux / 185 fc |



**THELIGHT**  
PIONEERS ON PANELS MADE TO LAST

specifications subject to change without notice. THELIGHT technology is protected under Spanish License Laws with international patents pending