



KOSMOS 200 color


ref: VK200C-PACK

Includes: manual yoke with Euro28 junior pin, power cord with Neutrik PowerCon TRUE1 connector
Barndoors available



TECHNICAL SPECIFICATIONS

OPTICAL SYSTEM	motorized ZOOM Fresnel + changeable lampheads
LIGHT APERTURE	250mm / 10" borosilicate Fresnel lens
BEAM ANGLE	11° to 54° (half peak), motorized zoom with stepper motor
LIGHT INTENSITY	smooth 0 to 100%, three selectable dimming curves
COLOR TEMPERATURE	continuously adjustable from 2500K to 10000K
GREEN-MAGENTA	continuously adjustable (full Plusgreen to full Minusgreen)
COLOR RENDITION	typical 96 CRI / 96 TLCI
HIGH SPEED	over 12,000 fps
LIGHT ENGINE	30mm full color spectrum R+G+B+W+CW VELVET ceramic LED
COLOR CONTROL MODES	CTT mode, HSI mode, CTT+RGB mode, GELS mode, EFFECTS mode with ZOOM in every mode NOTE: base Kelvin white light can be set combined with any color
CONTROL (LOCAL)	TFT full-color display with touchscreen, 2 rotary knobs with push-button
CONTROL (WIRE)	Full DMX-RDM with XLR-5 IN & OUT connectors
CONTROL (WIRELESS)	LumenRadio CRMX (optional), Wi-Fi Art-Net sCAN and Bluetooth, Android and IOS free VELVET Goya App
INTERFACE	TFT full-color display with touchscreen, 2 rotary dials with pushbutton
DIMENSIONS with yoke	520mm x 318mm x 455mm
FIXTURE WEIGHT	9,9 kg / 21.8 lbs fixture + yoke
POWER	230W (2.1 Amps at 110 VAC) with PFC
AC INPUT VOLTAGE	90-264V AC 50/60Hz PowerCon TRUE1 TOP IN & OUT connectors
LED RATED LIFE (L70)	exceeds 50,000 hours
COOLING	VELVET 3D chamber cooling system with silent fan
PROTECTION	IP30, indoor or outdoor protected use
CONSTRUCTION AND FINISH	fixture and yoke made of die-cast aluminum
RIGGING OPTIONS	aluminum yoke with universal junior 1-1/8" (28mm) outer diameter combined with baby receiver 5/8" (16mm), pole operated yoke

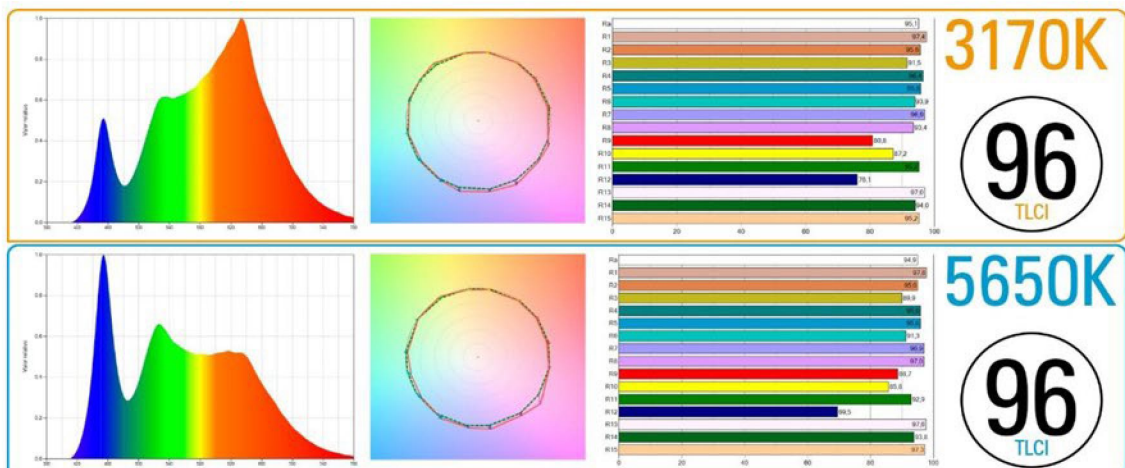



KOSMOS 200 color

ref: VK200C-PACK

Includes: manual yoke with Euro28 junior pin, power cord with Neutrik PowerCon TRUE1 connector
Barndoors available

