lighting solutions

2017 | 2018

e «alux











www.exalux.eu



"beautiful pictures always start with beautiful lights"



new products



"inexoraably" perfect, customizable "in a snap"



EZLED

LED lighting without limits



LEDFLEXX

LED ribbons with EXALUX's DNA



CONNECTRX

RX1005

wireless in your pocket



STIXX

ACTIONFX

tiny light in action, tiny light in any situation



UBOOST

DC24W108-VL

keep your LEDs running longer!



Pictures, weights and technical specifications are only indicative, not binding



EXIORAA

TRACKDMX

"inexoraably" perfect, customizable "in a snap"















EXORAA[™] is the first "Ultra Compact" LED fixture designed by EXALUX[™] with the French DOP Jean CLAVÉ for small TV studios and WebTV.

EXORAA™ concept is based on a SORAA™ AR111 LED engine and fully customizable in "a snap".



- AR111 SORAA lamp fixture
- Interchangeable beam spreaders & CCT shifters
- Dimmable from 10% to 100%
- DMX/Manual dimming mode
- ▶ Easy to install & power via a 3-circuit lighting track



IN THE BOX





delivered with Soraa Vivid 4000K 9° AR1111





25° BEAM SPREADER 36° BEAM SPREADER

OPTIONAL ACCESSORIES





60° BEAM SPREADER 1/4 CTO CCT SHIFTER




40° LOUVER

AVAILABLE COLOURS







e:<alux

EZLEDLED lighting without limits



ezLED[™] is a turnkey solution made of a wide variety of linear flexible LED boards, connection

boards, connectors and cables.



reduced heat



solderless




cuttable



flexible

Thanks to its incredible power efficiency, ezLED modules can be directly used without additional heatsink.

- High lumen output, high efficiency, reduced heat
- Suits any surface without risk of burning
- Natural white, vibrant colours, Ra 95 (typ)
- No soldering required for connection

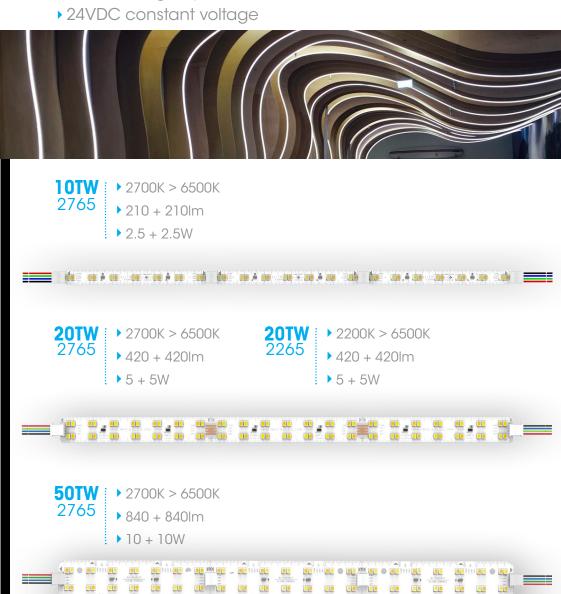

e:«alux

EDFLEXX ED ribbons with EXALUX's DNA



Find all EXALUX's LED expertise in a full range of high CRI LED ribbons especially designed to

get a perfect colour rendering at any colour temperature.







flexible



high CRI










- Professional LED ribbons
- ▶ High colour rendering
- Natural white, vibrant colours
- Perfectly dimmable

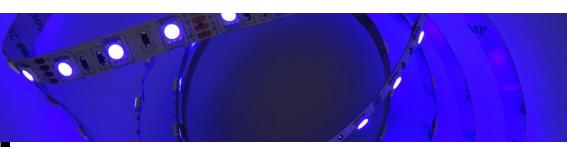

TAPE12-RGB W32





TAPE10-TW2765





TAPE12-RGB W56





TAPE10-TW2765 HD





TAPE20-RGB TW2265 (5 in 1)







DNNECTRX

CRMX wireless control in your pocket!





2.4GHz




up to 100m



RX100s is a tiny DMX receiver which allows you to wirelessly control any DMX device.

RX100s dongle is certainly all what you expect: compact, universal, userfriendly and shock proof.

- CRMX by LumenRadio Wireless DMX receiver
- Shock proof thanks to the integrated antenna
- ▶ 5VDC USB powered
- ▶ Up to 20h standalone autonomy thanks to the PowerBank

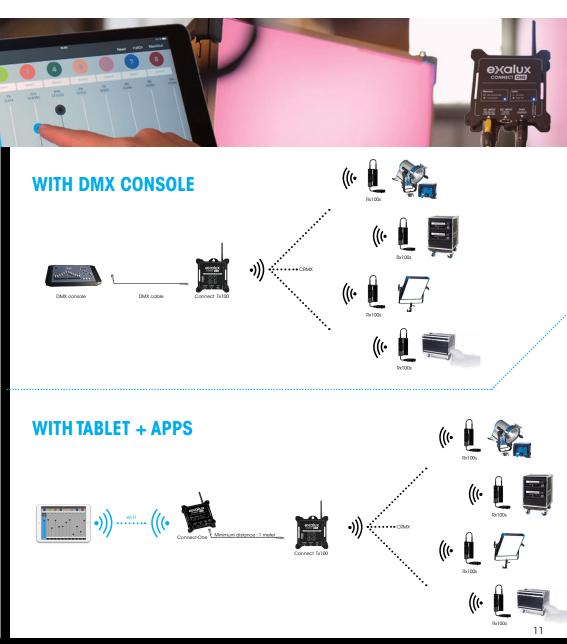



ACTIONEX tiny light in action, tiny light in any situation











special FX

STIXX ACTION FX kit enables technicians to create little and standalone lighting

DimLITE FX is the dimmer you were waiting for, especially designed to bring you efficiency and save your time.

sets thanks to the USB power input.

- All-in-one standalone special effects lighting kit
- Tunable White 2200-6500K
- ▶ +5VDC USB input only
- Special effects generator
- ▶ "Candle like" 2200K Warm white

DIMLITE USB-FX

- Constant voltage 32KHz flicker free dimmer
- Tunable White / FX modes
- ▶ Special Effects processor
- ▶ 5VDC in I 10W
- +24VDC voltage booster
- Full dimming 0 >100%



STIXX S

- ▶ 140 lm I ~1.6W
- > 2200K > 6500K
- ▶ 149mm

STIXX L

- ▶ 280 lm | ~3,3W
- > 2200K > 6500K
- ▶ 264mm



SPECIAL FX













STORM

HEAVY STORM

IN THE BOX

1x STIXX STW2265 1x STIXX LTW2265 1x DIMLITE USB-FX 1x POWER BANK 1x USB CABLE
1x 3m extension cable



UBOOST DC24W108-VL Keep your LEDs running longer!










uBOOST DC24W108-VL will bring to technicians a safe solution to power LED lighting solutions.

uBOOST DC24W108-VL steps up and regulates DC voltage from a V-Lock battery to a fixed 24VDC voltage required by your LED lighting equipment.



- > 24VDC / 108W step-up converter
- ▶ Battery energy saving thanks to 98% high efficiency
- Designed for V-Lock battery

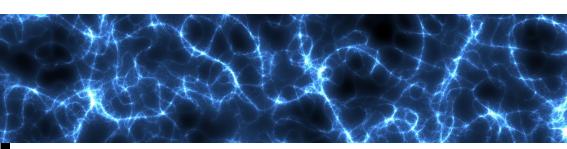

NOT SAFE FOR LEDS



SAFE FOR LEDs





e:«alux

LIGHTING FIXTURES

LED PANELS



ROCK WIDE

- ▶ 8 300lm | 118W | IP54
- Tunable White 27/65K
- ▶ DMX+Bluetooth



ROCK CLASSIC

- ▶ 4 000lm | 57W | IP54
- Tunable White 27/65K
- ▶ DMX+Bluetooth

MINI PANELS




BRIKS 1X1

- ▶ 800lm | 10W
- Tunable White 29/65K
- ▶ DMX remote dimming



BRIKS 1X2

- 1600lm | 20W
- Tunable White 29/65K
- ▶ DMX remote dimming



BRIKS 1X4

- 3200lm | 40W
- Tunable White 29/65K
- DMX remote dimming




BRIKS 2X2

- 3200lm | 40W
- Tunable White 29/65K
- ▶ DMX remote dimming



BRIKS DMX CONTROLLER

- ▶ 3 BRIKS outputs
- DMX512 in/out
- ▶ 15VDC

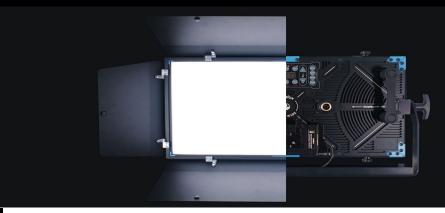

AR111 FIXTURES



EXORAA SHOP

- AR 111 lamp and snap on demand
- ▶ No dimming
- Powered via 3-circuit lighting track



EXORAA TRACK DMX

- 1 040lm | 4000K | 9° | 20W
- DMX | manual dimming
- Powered via 3-circuit lighting track



EXORAA TRACK WIRELESS

- ▶ 1 040lm | 4000K | 9° | 20W
- DMX | CRMX | manual dimming
- ▶ Powered via 3-circuit lighting track



EXORAA RAG

- ▶ 1 040lm | 4000K | 9° | 20W
- Integrated manual dimmer
- Powered via battery or external power supply



EXORAA VERSA

- ▶ 1 040lm | 4000K | 9° | 20W
- External constant voltage dimming (optional)
- ▶ Powered via battery or external power supply



LIGHTING "DIY" SOLUTIONS

WHITE LED TAPES



TAPE10-K27

- ▶ 900lm/m | 15W/m | 12VDC
- ▶ Warm 2700K ±75K | Ra95
- ▶ 10*5000MM



TAPE10-K32

- ▶ 900lm/m | 15W/m | 12VDC
- Tunasten 3200K ±75K | Ra95
- ▶ 10*5000MM



TAPE10-K56

- 1300lm/m | 15W/m | 12VDC
- Daylight 5600K ±150K | Ra95
- ▶ 10*5000MM



TAPE10-TW2765

- ▶ 1060lm/m | 19W/m | 12VDC
- Tunable White 27/65K | Ra95
- ▶ 10*5000MM



TAPE10-TW2765 HD

- ▶ 1740lm/m | 19W/m | 24VDC
- Tunable White 27/65K | Ra95
- ▶ 10*5000MM

FULL COLOUR LED TAPES



TAPE12-RGBW32

- ▶ 19W/m | 24VDC
- Tung. 3200K ±75K | Ra95
- ▶ 12*5000MM



TAPF12-RGBW56

- ▶ 19W/m | 24VDC
- Day. 5600K ±150K | Ra95
- 12*5000MM



TAPE20-RGB TW2265

- ▶ 30W/m | 24VDC
- RGB | 2200K | 6500K | Ra95
- 20*5000MM



COLOUR LED TAPES



TAPE12-RGB

- ▶ 14,4W/m | 12VDC
- RGB
- ▶ 12*5000MM



TAPE10-RED

- ▶ 14,4W/m | 12VDC
- ▶ 630nm
- 10*5000MM



TAPE10-GREEN


- ▶ 14,4W/m | 12VDC
- ▶ 515nm
- ▶ 10*5000MM



TAPF10-BLUF

- ▶ 14.4W/m | 12VDC
- ▶ 461nm
- ▶ 10*5000MM

WHITE MODULES




: ezLED 10 TW2765

- ▶ 1260lm/m | 15W/m | 24VDC
- Tunable 2700 > 6500K | Ra95
- ▶ 10*336MM



ezLED 20 TW2265

- > 2520lm/m | 30W/m | 24VDC
- Tunable 2200 > 6500K | Ra95
- ▶ 18*336MM



: ezLED 20 TW2765

- ▶ 2520lm/m | 30W/m | 24VDC
- Tunable 2700 > 6500K | Ra95
- ▶ 18*336MM



ezLED 50 TW2765

- ▶ 5040lm/m | 60W/m | 24VDC
- Tunable 2700 > 6500K | Ra95
- ▶ 50*336MM



WIRELESS + DIMMING

Wi-Fi NODE



CONNECT ONE

- ▶ Wi-Fi | Art-Net | DMX node
- Wi-Fi 2.4GHz access point
- ▶ 1 DMX universe

CRMX 2.4GHz



CONNECT TX100

- Wireless DMX Transmitter
- CRMX by Lumen Radio
- Range: 500-1000m



CONNECT RX100

- ▶ Wireless DMX receiver
- CRMX by Lumen Radio
- Range: 500-1000m





DMX CONNECT

- IOS | Android DMX console
- > 48 channels
- Free download



CONNECT RX100s

- ▶ Wireless DMX receiver
- CRMX by Lumen Radio
- ▶ Range: 50m-100m



DMX CONNECT PLUS

- IOS | Android tablet DMX console
- ▶ 512 channels | 16 memories
- ▶ "Fader" mode | "live" mode



LEDMASTER



LEDMASTER CLASSIC

- ▶ 6+6A | 32kHz | 12-24VDC
- ▶ Tunable White | Individual
- Flicker free



LEDMASTER STICK

- ▶ 3+3A | 32kHz | 12-24VDC
- Tunable White | Individual
- Flicker free



LEDMASTER STICK FX

- ▶ 3+3A | 32kHz | 12-24VDC
- Tunable White | FX mode
- ▶ Flicker free



DIMLITE DL2X2A

- ▶ 2+2A | 32kHz | 12-24VDC
- Individual mode
- ▶ Flicker free



DIMLITE ONE

- ▶ 6A | 32kHz | 12-24VDC
- DMX512 IN/OUT
- ▶ Flicker free

STUDIO



STUDIO MASTER

- ▶ 7.5A*4 | 32kHz | 12-24VDC
- Tunable | RGBW | Indivi.
- Pwm link to Slave



STUDIO SLAVE

- 7.5A*4 | 32kHz | 12-24VDC
- Tunable | RGBW | Indivi.
- ▶ Pwm link to Master



STUDIO MASTER OEM

- 7.5A*4 | 32kHz | 12-24VDC
- Tunable | RGBW | Indivi.
- ▶ Pwm link to Slave



STUDIO SLAVE OEM

- 7.5A*4 | 32kHz | 12-24VDC
- Tunable | RGBW | Indivi.
- Pwm link to Master



POWER SOLUTIONS

VOLTAGE BOOSTERS



: uBOOST DC24W108

- ▶ 24VDC | 108W | 98% efficiency
- ▶ 12-20VDC input
- XLR4 in | XLR4 out



uBOOST DC24W108-VL

- ▶ 24VDC | 108W | 98% efficiency
- ▶ 12-20VDC input
- V-LOCK in | XLR4 out

it's time to join our "French Revoluxion"





Here at EXALUX, we design lighting solutions and remote control systems for the broadcasting and cinema markets that reflect our values:









Innovation

User-friendly

French touch

Eco-friendly

INNOVATION TO MEET YOUR NEEDS

We are convinced that technological and user-centric innovations are the two essential components to let you create complex lighting sets in all situations.

FIELDS OF EXPERTISE







control



dimming



