

THE LIGHT
PANELS MADE TO LAST

VELVET MINI 1

THE QUICKEST & RAINPROOF PORTABLE PANEL



N A T U R A L

VELVET BEAUTY LIGHT


- ▶ ROBUST, 100% Aluminum body
- ▶ PORTABLE, Half size 1x1 Led panel

IT IS SOFT, IT IS

VELVET MINI
LIGHT

VELVET MINI 1 SERIES

the same robust, silent powerful & easy to use VELVET quality under a small & portable housing for Videographers

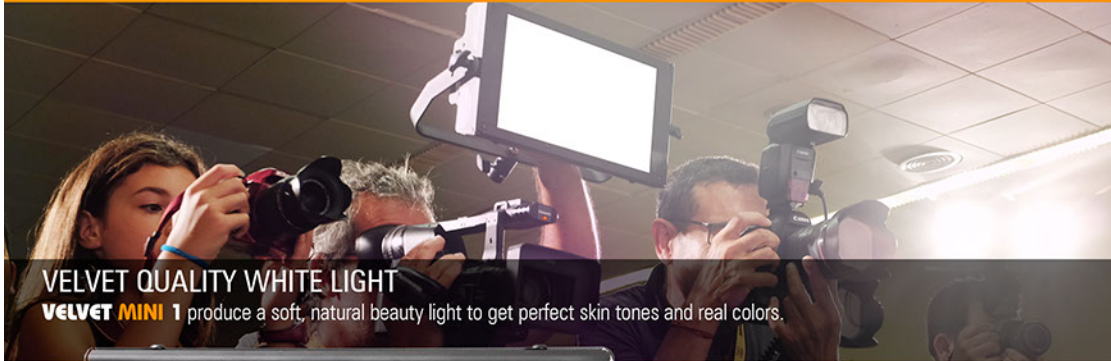

VELVET QUALITY WHITE LIGHT

VELVET MINI 1 produce a soft, natural beauty light to get perfect skin tones and real colors.



QUICK MOUNTING ACCESORIES

Complete your set with foldable Snappgrids, Snapbags, Cordura bags, Remote controls...



QUICK SETUP

On-board user friendly digital display with shock-resistant buttons with dedicated 3200K / 5600K quick-access button.



VELVET BEAUTY LIGHT

VELVET MINI are workhorse lights to travel and get natural and stylish images

SMART AC/DC POWERED

VELVET MINI 1 is always ready to operate worldwide

- ▶ With Smart Vlock AC Adapter 90-264 VAC
- ▶ With Vlock battery mount and the removable Vlock battery mount (PRO version)
- ▶ With integrated PSU into the low profile STUDIO version chassis



MORE THAN BI-COLOR

VELVET MINI 1 offers more than tungsten & daylight in the same unit.
Adjust precisely the color temperature from 2700K to 6500K

RAINPROOF IP54

VELVET MINI 1

TECHNICAL SPECIFICATIONS

DIMENSIONS

345 x 190 x 90 / 13,6 x 7,5 x 3,5"

WEIGHT

1,9 Kg / 4,2 lbs

POWER DRAW 50W / 0,45 Ah at 110 VAC

POWER SUPPLY

12-35 VDC through Vlock battery plate
Smart Vlock AC Power adapter 90-264 VAC 50/60 Hz
Integrated internal PSU (VELVET MINI 1 STUDIO)

PHOTOMETRICS

1200 lux / 111 fc at 1 meter / 3 feet
150 lux / 14 fc at 3 meters / 10 feet

COLOUR RENDERING INDEX 95 / BEAM ANGLE 100%

OUTPUT FREQUENCY 16 KHz flicker-free up to 1000 fps

COLOUR TEMPERATURE 2700 K to 6500 K in 100 K increments

LIGHT INTENSITY Dimmable 0 to 100% (Smooth & flicker-free)

LED | Rated life More than 50,000 hours L70 / More than 50,000 hours L80

Technology OSRAM selected BIN LED Core unit + Optic diffuser + CPU software control

CONSTRUCTION AND FINISH Black anodized extruded aluminum and black powder coated sheet aluminum

RIGGING OPTIONS Aluminum yoke with 16mm baby receiver / 28mm junior pin. Four sliding threads 1/4" for riggings located on panel sides

QUICK MOUNTING ACCESSORIES Quick link Vlock or Gold battery mount, Smart Vlock AC power adapter, foldable Snapgrid, foldable Snapbag diffuser, removable barn doors, Remote Control through XLR-5 connector, cordura case, hard case

EXCLUSIVE PRO & STUDIO BENEFITS





MAIN ADVANTAGES

- ▶ Rainproof shock resistant aluminum body
- ▶ Quick link on-board Vlock battery mount (VELVET MINI 1 BASIC & PRO)
- ▶ Smart Vlock 90-264V AC adapter
- ▶ More than bi-color 2700K to 6500K digital & dedicated 3200K/5600K quick-access button
- ▶ On-board and DMX RDM control (VELVET MINI 1 PRO & STUDIO)
- ▶ Optional remote control through XLR5 connector

VELVET MINI 1 RAINPROOF BASIC



VELVET MINI 1 RAINPROOF PRO



VELVET MINI 1 STUDIO



COMPARISON WITH OTHER PANELS

- | | |
|--|--|
| ▶ rainproof and shock resistant aluminum body | ▶ instantly ready AC & DC through Smart Vlock AC adapter |
| ▶ quickest set up and adjustment | ▶ more than bi-colour 2700 to 6500 K |
| ▶ digital display with shock resistant buttons | ▶ affordable European quality |
| ▶ perfect color rendition & consistency lamp to lamp | ▶ 2 years warranty 100% made & designed in Barcelona (Spain) |



www.thelight.com.es

Intellectual Property: THELIGHT VELVET light technology is protected under spanish patents and international patents pending
Specifications subjects to change without notice

2016 . Copyright THELIGHT. All rights reserved