

Product Description

Celeb IKON12 delivers the classic 4x1 Kino Flo form factor in a powerful, modern softlight. With an IP65 rating, it's built for reliable performance in any environment—indoors or outdoors—and introduces our latest technical breakthrough: a new RGB-cW-wW LED engine capable of driving 1200W of full power to every white point and color setting.

Move confidently from warm to daylight tones and tackle demanding color-rendering challenges with an LED system powered by two newly engineered full-spectrum white sources. The result is the broadest, most accurate white light available on the market.

Driven by the True Match® operating system, Celeb IKON12 gives you precise control over the exact look you want on camera. Dial in flawless color temperature and dimming for close-ups, or explore fully saturated colors using hue-angle adjustments and direct RGB input.

True Match® also streamlines on-board operation and makes remote configuration effortless for lighting programmers via RDM and DMX. LumenRadio wireless DMX comes standard, and rigging is simplified with an adjustable, removable yoke, a Junior pin, and integrated feet for flexible mounting and staging options.


Key Features

- RGB-cW-wW LED Engine with improved White and Color Space Spectrums
- IP65 rated - Dust Tight and protected in wet conditions
- 16 independently controlled zones
- Control Protocols: Wireless DMX, RDM, sACN, ArtNet, 5-Pin XLR DMX In/Out, Ethercon In/Out,
- DMX and Ethernet Data Pass Thru
- Built-in wireless CRMX Control
- Removable Diffusion
- USB-C for storing / loading presets
- Firmware updates via ethernet (ftp) and USB-C
- Jr Pin mount and feet for staging, mounting, and hanging
- Touch screen menu and control dial
- Integrated power supply with PowerCON TRUE1 in / out ports for daisychaining (no external ballast)




Specifications & Dimensions


- 1200 watts of Power to all white and color points
- CCT Range: 2500°-9900°K
- TLCI: 99
- TM-30 Rg: 100.1
- TM-30 Rf: 96.3
- IP65 dust tight and water resistant
- Beam Angle: 109°
- Weight: 72.8 lbs / 33 kg
- (with yoke, jr pin and diffusion)

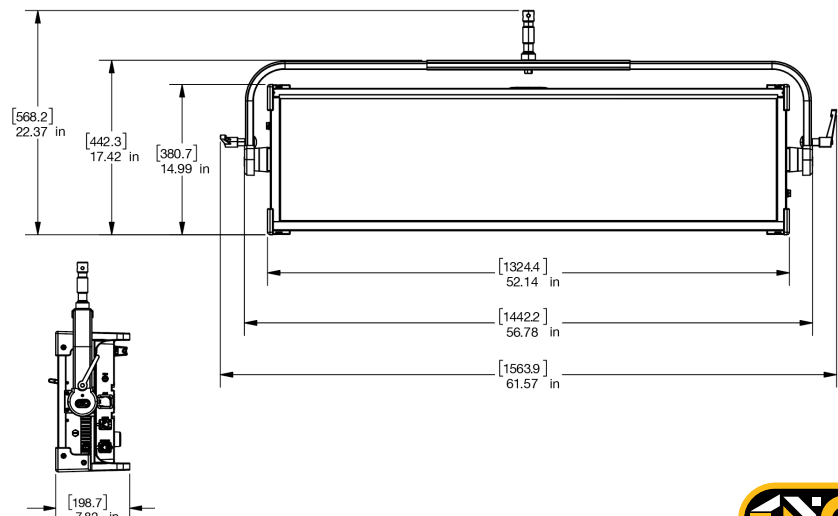


Spectral Distribution - 3200K

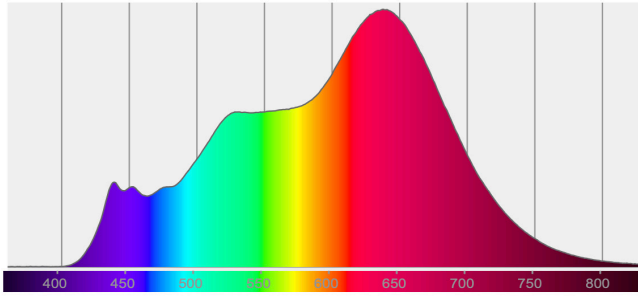


Beam Details - 3200K

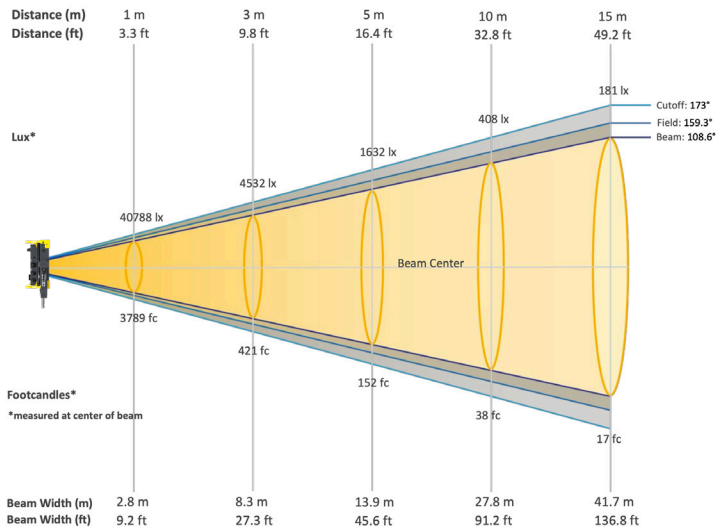

Spectral Distribution - 5600K

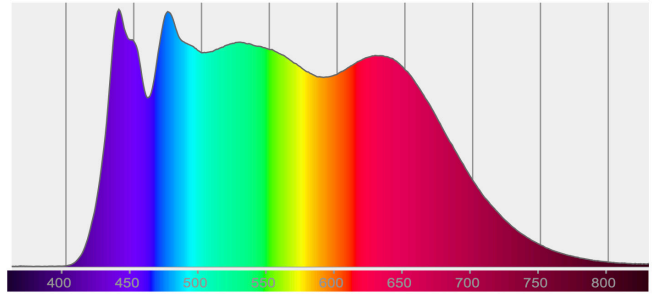

Beam Details - 5600K

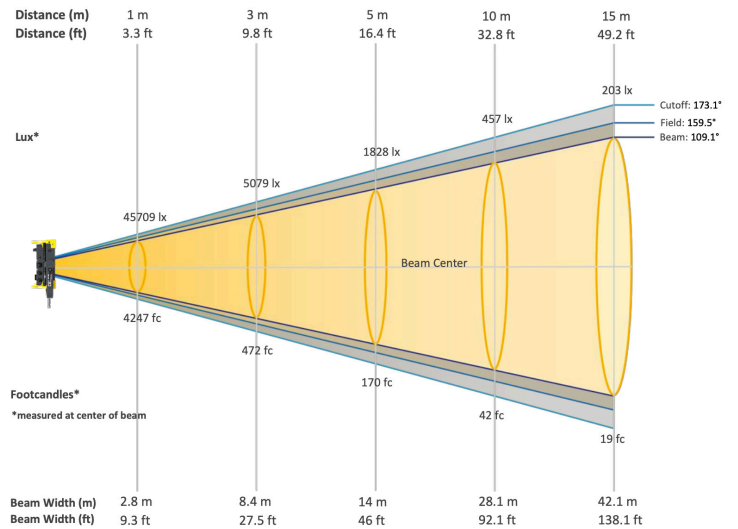

Beam Intensities - 3200K

Distance	1m	3m	6m	9m	12m	15m
Lux	40788	4532	1133	504	283	181
Distance	3.3ft	9.8ft	19.7ft	29.5	39.4	49.2
FC	3789	421	105	47	26	17

Beam Intensities - 5600K

Distance	1m	3m	6m	9m	12m	15m
Lux	45709	5079	1270	564	317	203
Distance	3.3ft	9.8ft	19.7ft	29.5ft	39.4ft	49.2ft
FC	4247	472	118	52	29	19