




**KINO FLO**  
Lighting Systems

# celeb<sup>®</sup> 850

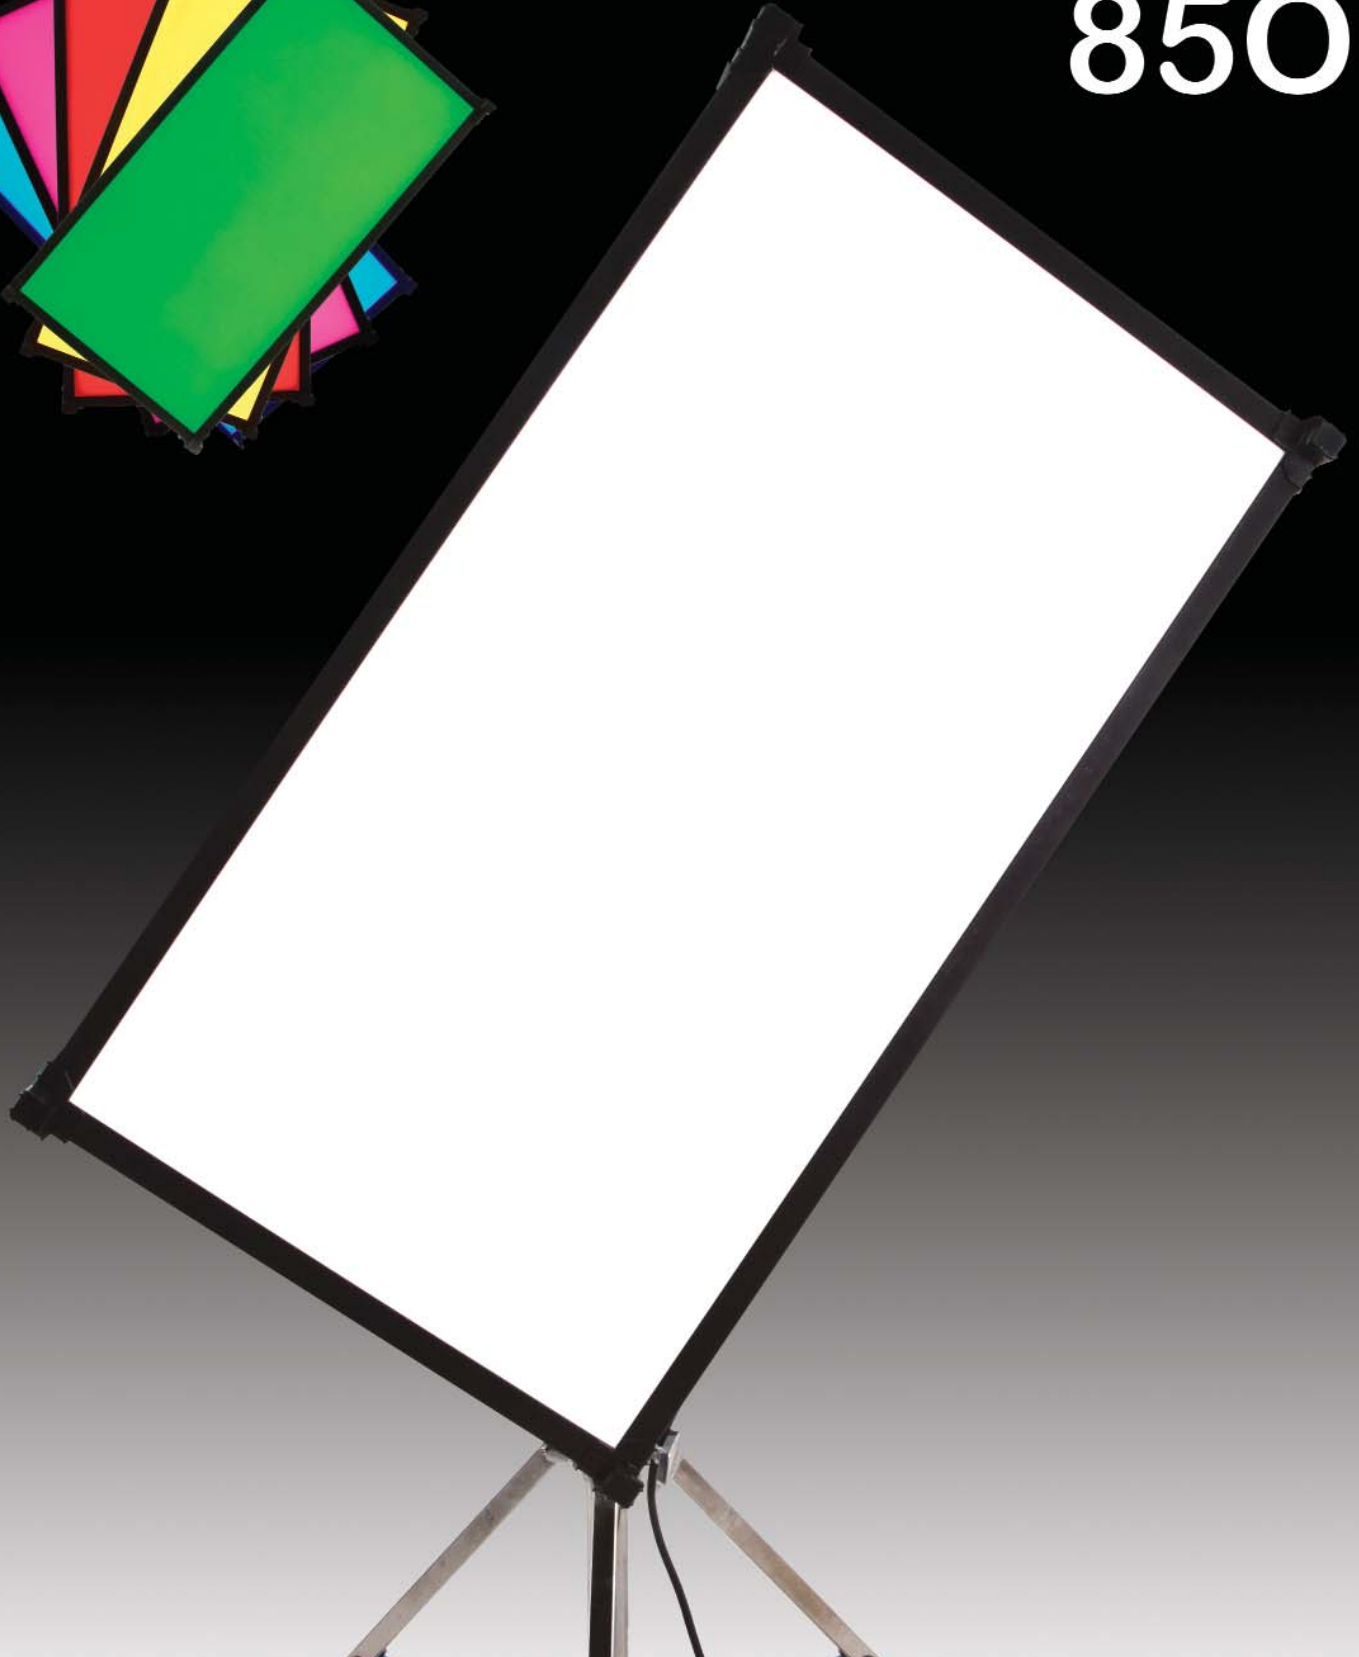

# Celeb® 850 LED DMX



Center Mount Back



Yoke Back



Yoke Front

The Celeb® 850 joins Kino Flo's family line of LED soft lights. With new technical innovations the Celeb 850 features four menu options, one white, two colors and **FX**. In the white menu, Kelvin range is from 2700K to 6500K with **Dimming**, **Kelvin** and **Green/Magenta** control channels. In the first color menu, Kelvin is from 2500K to 9900K with three additional channels, **Gel**, **Hue Angle** and **Saturation**. The Gel channel includes Kino Flo presets and over 100 well-known lighting gels. The second color menu provides individual **RGB** (red, green, blue) control. The **FX** (Effects) menu has custom presets like Candle, Fire, TV, Police, Lightning, Paparazzi, Pulse and Scroll. The Celeb 850 also comes with standard DMX and wireless DMX (Lumen Radio®), and universal input 100-240VAC. SnapBag and SnapGrid accessories are also available.

#### Features include:

- Kelvin presets & custom settings, 2500K-9900K
- Manual & DMX Dimming, DMX wireless (Lumen Radio)
- Green/Magenta control
- Dial in any color through Hue Angle and Saturation control
- Kino Flo presets and Gels
- RGB control
- FX (Effects) control
- Center Mount, Yoke Mount & Pole-Op

#### ▼ Celeb 850 LED DMX Center



**CEL-850CU**  
Celeb 850 DMX  
Center Mount, Univ



**LVR-CE890**  
Celeb 850 Louver, 90°  
(Included)



**MTP-V63C**  
Celeb 850 Center  
Mount Assembly  
(Included)



**MTP-V63JR**  
Celeb 850 Center  
Junior Adapter (28mm)  
(Included)

#### ▼ Celeb 850 LED DMX Yoke



**CEL-850YU**  
Celeb 850 DMX  
Yoke Mount, Univ



**CEL-850PU**  
Celeb 850 DMX Pole-Op,  
Univ



**LVR-CE890**  
Celeb 850 Louver, 90°  
(Included)

▼ Photometrics

Celeb 850

FC	1728	604	297	171	111	78	59	47	37	31
Feet	2	4	6	8	10	12	14	16	18	20
LUX	23040	9270	4527	2664	1755	1251	927	728	590	484
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

▼ Fixture Specifications

Fixture	Input Voltage VAC	Amps VAC	Kelvin Range	Dimming Range	Dimensions	Weight
Celeb 850 DMX Center	100~240VAC, 50/60Hz, 575W	5.0A 2.5A	2500~9900	100%~1%	45 x 6 x 25.5" (114 x 15 x 65cm)	40 lb (18kg)
Celeb 850 DMX Yoke	100~240VAC, 50/60Hz, 575W	5.0A 2.5A	2500~9900	100%~1%	50 x 5 x 28" (127 x 13 x 71cm)	38 lb (17kg)

▼ Details



▼ Celeb 850 LED DMX Kits



**KIT-C850U**

Celeb 850 LED DMX Center Mount Kit, Univ

Contents	Dimensions	Weight
1 Celeb 850 LED DMX Center	52 x 10 x 30.5"	74 lb
1 Ship Case	(132 x 25 x 77cm)	(34kg)



**KIT-C850YU**

Celeb 850 LED DMX Yoke Mount Kit, Univ

Contents	Dimensions	Weight
1 Celeb 850 LED DMX Yoke	53.5 x 10 x 36"	78 lb
1 Jr. Pin	(136 x 25 x 91cm)	(35kg)
1 Ship Case		

▼ Celeb 850 LED DMX Accessories/ Cases



**BRD-CE8**  
Celeb 850 Barndoors  
(Set of 4)



**LVR-CE860**  
Celeb 850 Louver, 60°



**7010050**  
Celeb 850 Yoke Assembly



**DFS-CE800-S**  
Celeb 850 SnapBag  
w/ 2 x Diffusion



**MTP-180**  
Junior Pin Assembly  
for Yoke (28mm)



**7010051**  
Celeb 850  
Pole-Up Assembly



**LVR-CE840-S**  
Celeb 850 SnapGrid, 40°



**MTP-V63H1**  
Celeb 850 Center  
Hanging Adapter (28mm)



**KAS-CE850**  
Celeb 850 Center Ship Case

**KAS-CE850-Y**  
Celeb 850 Yoke Ship Case



**Kino Flo Lighting Systems**  
**2840 North Hollywood Way**  
**Burbank, CA 91505**

**+1 818 767 6528 voice +1 818 767 7517 fax**

**[www.kinoflo.com](http://www.kinoflo.com)**

**© Kino Flo Celeb 850 LED DMX  
No. 3110100 Rev D**