
Cinelex SKYNODE

USB-powered wireless DMX receiver, designed for effortless integration with ARRI SkyPanel

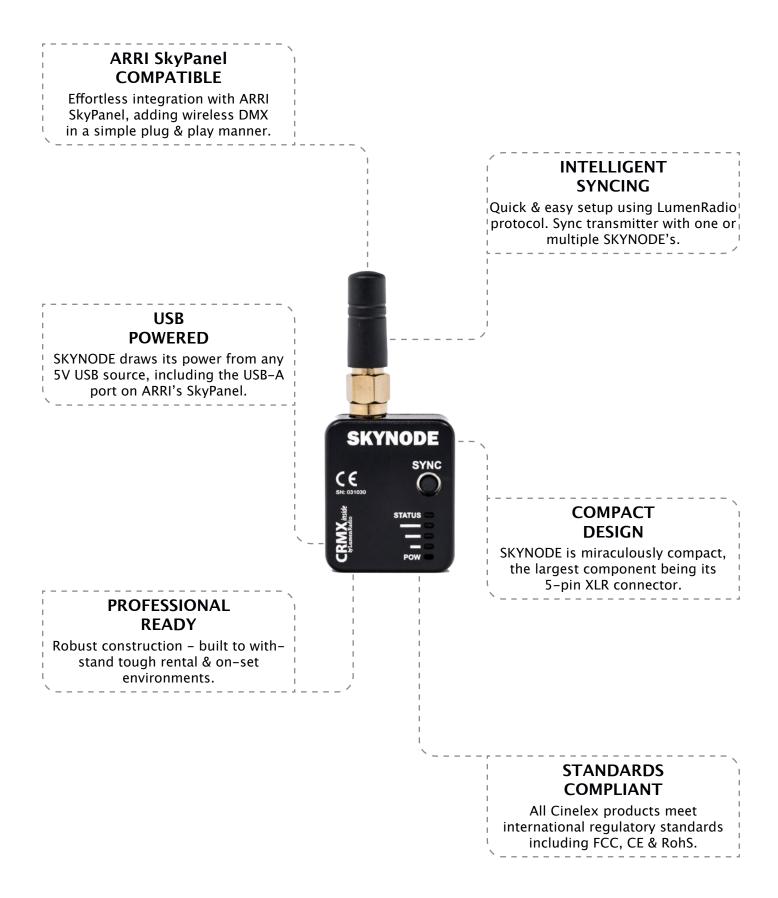

Cinelex SKYNODE

USB-powered wireless DMX receiver, designed for effortless integration with ARRI SkyPanel

Specification

Wireless Protocol	
Protocol	LumenRadio
Operational Frequency	2.4GHz (2402–2480MHz)
Range	Up to 100m (environment dependent)
DMX	DMX512, DMX512 (1990) & DMX512-A
Power	
Micro-USB	
Power Consumption	1W
Controls	
1x "SYNC" Button	Synchronise SKYNODE with Transmitter
Connectors	
1x DMX XLR 5-Pin Male	
1x Micro-USB Power Input Female	
1x Built-In Antennae	
LED Indicators	
1x "STATUS" LED	Connection Status
1x "POW" LED	Power Input Confirmation
3x Signal Strength LEDs	Signal Strength Indicator
Size (with Antennae)	
Weight	50g
Dimensions	60mm x 25mm x 40mm (L x W x D)