


exalux CONTROL SKY

EXALUX™ CONTROL SKY is a 5-in-1 wireless DMX controller especially designed to control up to 20 SkyPanel® with sense and simplicity.

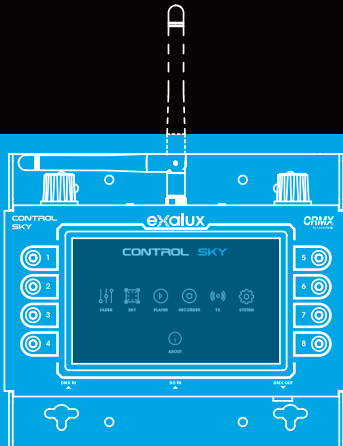

FEATURES

- ▶ 5-in-1 tools : SkyPanel® controller, DMX Console, CRMX Transmitter, DMX recorder, DMX Player,
- ▶ 1 DMX universe,
- ▶ 8 tact switches to save/reload memories,
- ▶ Black out function,
- ▶ Lock / unlock function,
- ▶ Runs up to 7h with a 10Ah/36Wh PowerBank,
- ▶ Fully compatible with EXALUX™ CONNECT.
- ▶ Able to control up to 20 SkyPanel®.

TECHNICAL SPECIFICATIONS


- ▶ 2,4GHz CRMX by LumenRadio™
- ▶ TFT 5.0" capacitive touch super bright display
- ▶ Link range : up to 1000 meters line-of-sight*
- ▶ +5VDC (USB) + 10-24VDC (XLR4) Input / ~5W
- ▶ XLR5 DMX input & output
- ▶ 180x154x50 mm | 700g

* depending on the receiver and the environment

Designed for the SkyPanel®

SKY CONTROL


SKY APP allows to control up to 20 SkyPanel® when DMX P30 mode is set : CCT+GM, HSI, RGBW, (X, Y), Effects, Source Matching, Filters.



Ready for all DMX fixtures


PLAYER

PLAYER APP allows to play the DMX memories that have been recorded with the FADER, SKY and RECORDER Apps





RECORDER

RECORDER APP allows to record 512 DMX channels in real time. 8 memories | 80s recording @44Hz max



FADER

FADER APP works the exact same way than your hardware DMX console you used for years. Every fader is linked to a DMX address.

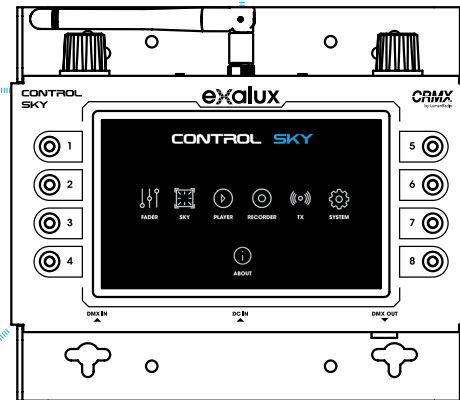

TX CRMX

TX APP turns the CONTROL SKY into a CRMX transmitter. The DMX data bytes received on the DMX input are wirelessly transmitted by the integrated CRMX transmitter.

